



INTRODUCTION

Diamond Coatings, a privately owned group of companies, is a recognised leader in the production and manufacture of vacuum coatings, which include transparent conductive coatings (our Diamox ITO range – Indium Tin Oxide) and optical coatings (our Diamox AR range – Eg: Broadband AR or V coat, 3DAR for Cinema application, Beam Splitter, etc).

Our AR coatings are individually designed and fine-tuned, to be deposited onto both glass and plastic, to meet your specific requirements and specifications.

In addition to our specialist coatings, Diamond Coatings also offer a wide range of coated films and we have now extended our film product range, to offer a high quality Anti-Reflective (AR) film, which we can provide by sheet, roll or directly laminated on your chosen substrate.

Our Diamox AR1617 film offers an enhanced level of higher transparency and is suitable for LCD's, PDP's, clear displays and touch panels, amongst others.

An additional benefit to our Diamox AR1617 Film is that it also boasts excellent Anti-Static and abrasion resistance properties, as well as being an anti chemical material, all of which contribute to our film's great performance. (See below)

DIAMOND COATINGS LTD.

Unit 2a, Harvey Works Industrial Estate, Shelah Road,

Halesowen, West Midlands, B63 3PG

Tel: +44 (0) 121 550 9430

Email: enquiries@diamondcoatings.co.uk
Web: www.diamondcoatings.co.uk

DIAMOND COATINGS INC.

4830 S. 36th Street, Phoenix, Arizona, 85040

Tel: +1 (480) 999 3456





COATING LAYER STRUCTURE

Protective Film (PE)

AR coating

Hard Coat with Anti-Static

PET 100 microns

Optically Clear Adhesive 20 microns

Protective Film (PE)

DIAMOND COATINGS LTD.

Unit 2a, Harvey Works Industrial Estate, Shelah Road,

Halesowen, West Midlands, B63 3PG

Tel: +44 (0) 121 550 9430

Email: enquiries@diamondcoatings.co.uk
Web: www.diamondcoatings.co.uk

DIAMOND COATINGS INC.

4830 S. 36th Street, Phoenix, Arizona, 85040

Tel: +1 (480) 999 3456





PROPERTIES

Product Name	Diamox AR1617 Film	
Substrate	Polyester film - 100μm	
		Method of Testing
Minimum reflection at 580-590nm	0.59% (588nm)	Note 1
Luminous reflection	0.74%	Note 1
Reflective Colour		
X	0.233	Note 1
Υ	0.191	
Total luminous transmission	94.4%	Note 2
Haze	0.1%	Note 2
Surface resistively	7 x 10 ¹⁰ Ohms/sq	Note 3
Cross cut test	Good	Note 4
Pencil Hardness	2-3H	750g
Abrasion resistance by steel wool	A	Note 5
PSA Peel test	8.0 N/25mm	Note 6
	No residual adhesive agent	

Note 1 UV-VIS-NIR Spectrophotometer - Absolute reflectance (5Deg incidence

Note 2 Apply to 1mm float glass - Haze Meter

Note 3 Surface resistively meter - HR type probe

Note 3 Scotch tape peeling on AR coated Layer

Note 5 Steel wool 200g/cm2 load

Scratch: 0-5: A 5-20: B > 20: C

Note 6 180Deg peel method

DIAMOND COATINGS LTD.

Unit 2a, Harvey Works Industrial Estate, Shelah Road,

Halesowen, West Midlands, B63 3PG

Tel: +44 (0) 121 550 9430

Email: enquiries@diamondcoatings.co.uk

Web: www.diamondcoatings.co.uk

DIAMOND COATINGS INC.


4830 S. 36th Street, Phoenix, Arizona, 85040

Tel: +1 (480) 999 3456





Transmission and Reflection of Diamox AR1617 Film

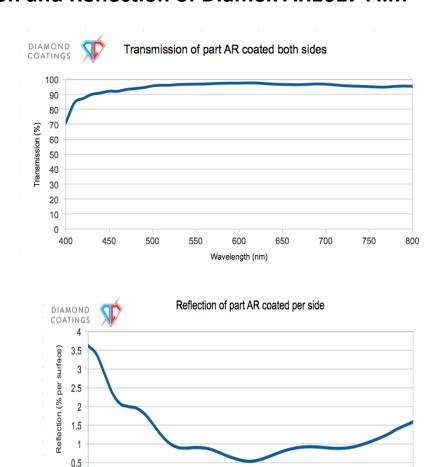

DIAMOND COATINGS LTD.

0 | 400

450

500

550

600

Wavelength (nm)

650

700

750

Unit 2a, Harvey Works Industrial Estate, Shelah Road,

Halesowen, West Midlands, B63 3PG

Tel: +44 (0) 121 550 9430

Email: enquiries@diamondcoatings.co.uk

Web: www.diamondcoatings.co.uk

DIAMOND COATINGS INC.

800

4830 S. 36th Street, Phoenix, Arizona, 85040

Tel: +1 (480) 999 3456





Contact Angle

Test Sample Contact Angle

Pure Water 103Deg

Oleic acid 59Deg

Environmental Testing

Test Sample Result Test Method

Heat Unchanged 103DegC – 500 Hours

Cycling Test Unchanged -30DegC to +60DegC – 50 times

Humidity Unchanged 60DegC – 90% RH – 500 Hours

DIAMOND COATINGS LTD.

Unit 2a, Harvey Works Industrial Estate, Shelah Road,

Halesowen, West Midlands, B63 3PG

Tel: +44 (0) 121 550 9430

Email: enquiries@diamondcoatings.co.uk
Web: www.diamondcoatings.co.uk

DIAMOND COATINGS INC.

4830 S. 36th Street, Phoenix, Arizona, 85040

Tel: +1 (480) 999 3456





Chemical Resistance

Test Condition:

Deposit a drop of test sample on film surface, wipe the drop after 30 minutes and check the surface.

These tests have not been done by an independent laboratory and are to be used for information only.

Test sample Result

Glass Cleaner Unchanged

Alcohol Unchanged

Acetone Unchanged

Kitchen cleaner 5% aq.sol. Unchanged

NaOH 1% aq.sol. Unchanged

NH4OH 3% ap.sol. Unchanged

HCl 3% aq.sol. Unchanged

DIAMOND COATINGS LTD.

Unit 2a, Harvey Works Industrial Estate, Shelah Road,

Halesowen, West Midlands, B63 3PG

Tel: +44 (0) 121 550 9430

Email: enquiries@diamondcoatings.co.uk

Web: www.diamondcoatings.co.uk

DIAMOND COATINGS INC.

4830 S. 36th Street, Phoenix, Arizona, 85040

Tel: +1 (480) 999 3456





Processing Care Point

Cleaning instructions:

Our Diamox AR1617 film can be cleaned with a soft microfibre cloth and breath wiping. For more stubborn marks, please use a soft cloth with Ethanol or IPA.

Machining Instructions:

If parts are to be machined after lamination, it is advised that the original protective film layer, provided with the Diamox AR1617 film, be removed and replaced with a low-tack protective film prior to machining, to ensure no knotting or film lifting etc.

DIAMOND COATINGS LTD.

Unit 2a, Harvey Works Industrial Estate, Shelah Road,

Halesowen, West Midlands, B63 3PG

Tel: +44 (0) 121 550 9430

Email: enquiries@diamondcoatings.co.uk

Web: www.diamondcoatings.co.uk

DIAMOND COATINGS INC.

4830 S. 36th Street, Phoenix, Arizona, 85040

Tel: +1 (480) 999 3456